

**BOMBAS DE PALETAS SERIE V10-V20 PARA APLICACIONES MÓVILES**

Reemplazo directo a Vickers serie V10-V20

**Especificaciones:**


SERIES	CAUDAL (GPM)	DESPLAZAMIENTO CC/REV	PRESIÓN MÁX. DE TRABAJO BAR(PSI)	VELOCIDA D MÁX. (RPM)
SV10	1	3.3	172(2500)	4800
	2	6.6		4500
	3	9.8		4000
	4	13		3400
	5	16.5		3200
	6	19.5	152(2200)	3000
	7	23	140(2030)	2800
SV20	6	19.5	172(2500)	3400
	7	23		3000
	8	26.5		2800
	9	29.7		
	10	33		2500
	11	36.4		
	12	39	152(2200)	2400
	13	42.5		2400

Para mayor informacion consultar a nuestro departamento técnico.




DIMENSIONES SERIE SV10-SV20

V10

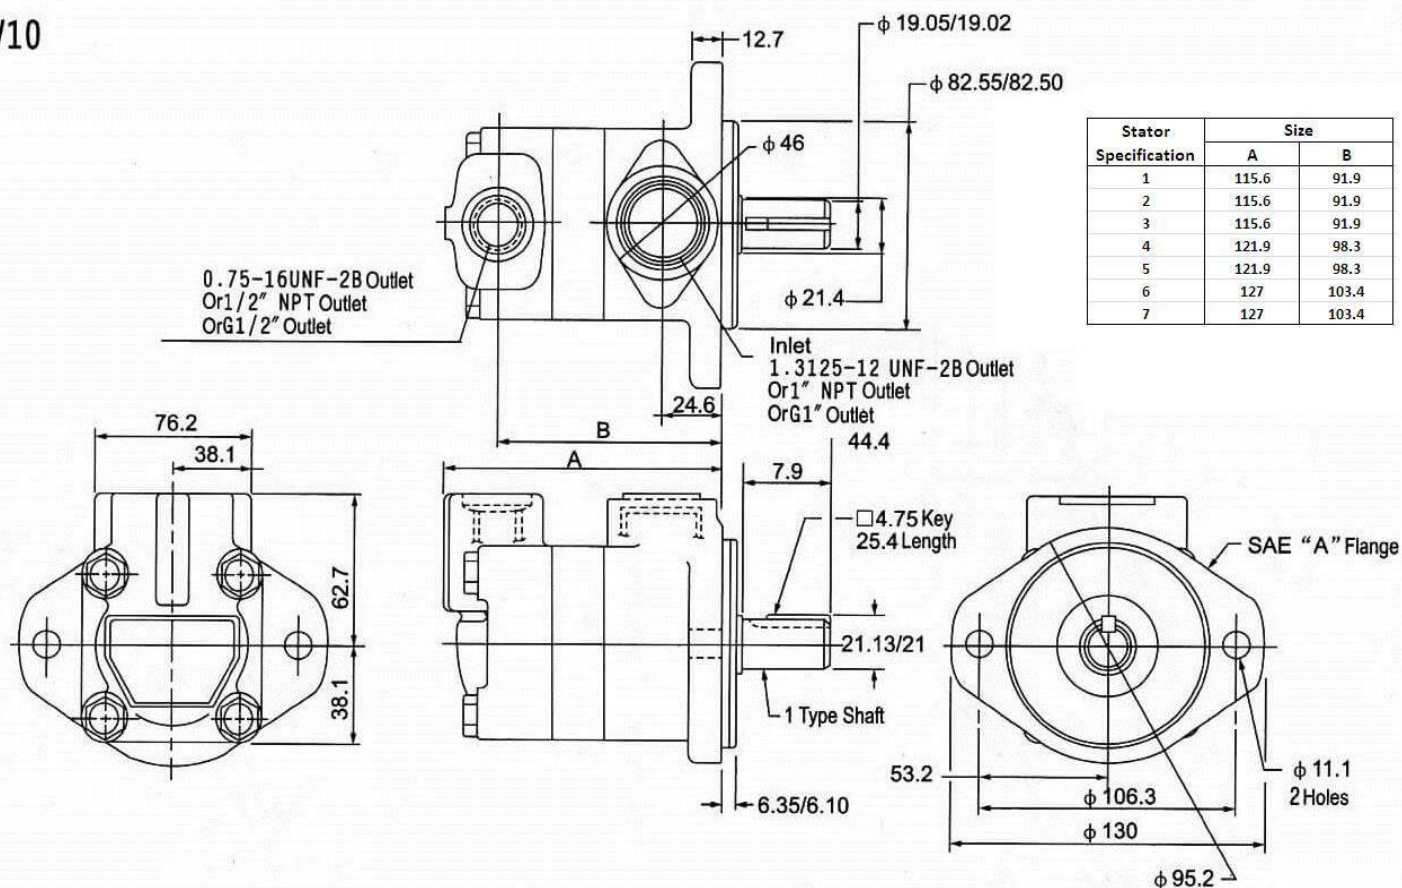

V20

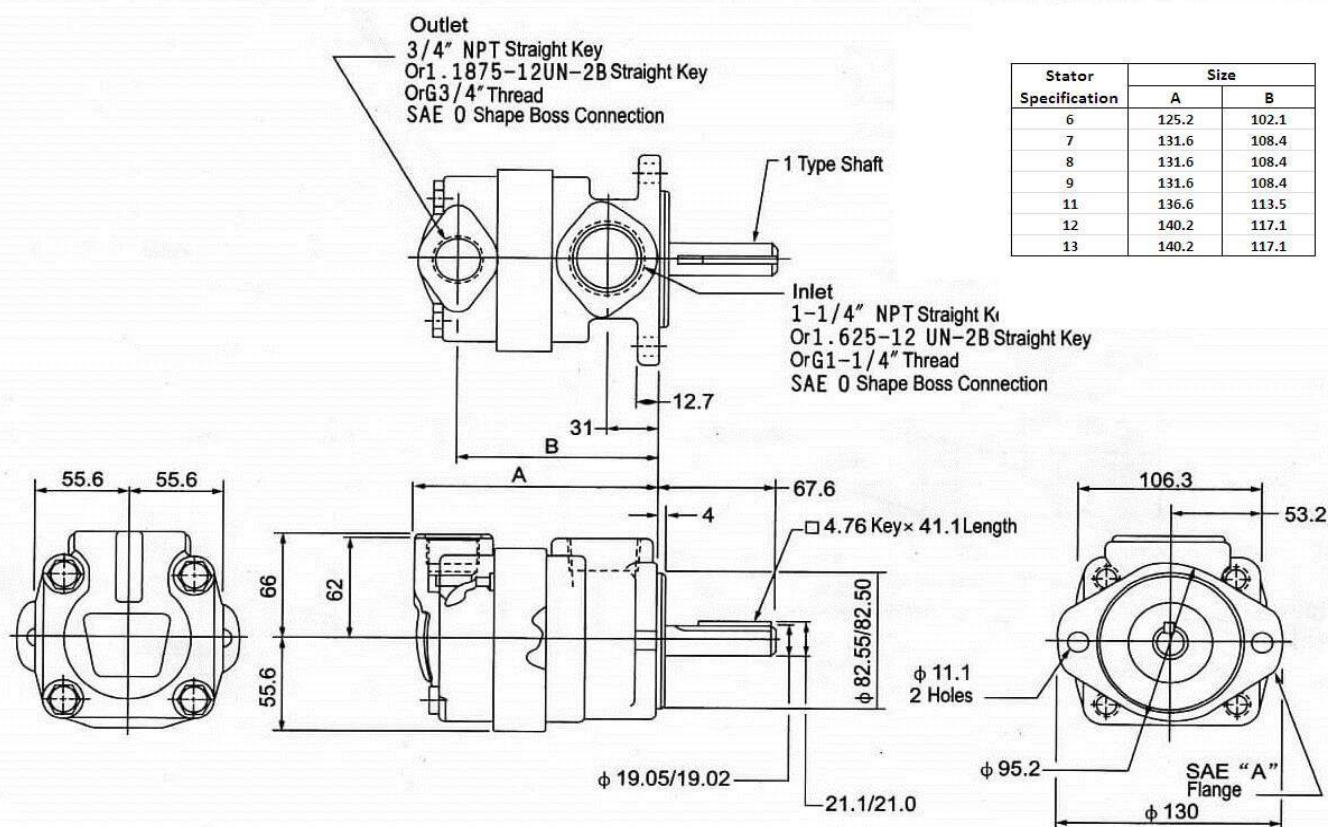

Para mayor informacion consultar a nuestro departamento técnico.

**BOMBAS DE PALETAS SERIE VQ PARA APLICACIONES MÓVILES***Reemplazo directo a Vickers serie VQ***Especificaciones:**


SERIES	CAUDAL (GPM)	DESPLAZAMIENTO CC/REV	PRESIÓN MÁX. DE TRABAJO	MÁXIMA VELOCIDAD (RPM)	VELOCIDAD MIN. (RPM)
S20VQ	5	18	210(3045)	2700	600
	8	27.4	210(3045)	2700	
	9	29.2	210(3045)	2700	
	11	36.4	210(3045)	2700	
	12	39.5	160(2320)	2700	
	14	45.9	140(2030)	2700	
S25VQ	12	40.2	210(3045)	2700	
	14	45.4	210(3045)	2700	
	17	55.2	210(3045)	2500	
	21	67.5	210(3045)	2500	
	25	80.2	210(3045)	2500	
S35VQ	25	81.6	210(3045)	2500	
	30	97.7	210(3045)	2500	
	35	112.8	210(3045)	2400	
	38	121.6	210(3045)	2400	
S45VQ	42	138.7	175(2537)	2200	
	50	162.3	175(2537)	2200	
	60	193.4	175(2537)	2200	

Para mayor informacion consultar a nuestro departamento técnico.



DIMENSIONES SERIE S20VQ

S20VQ

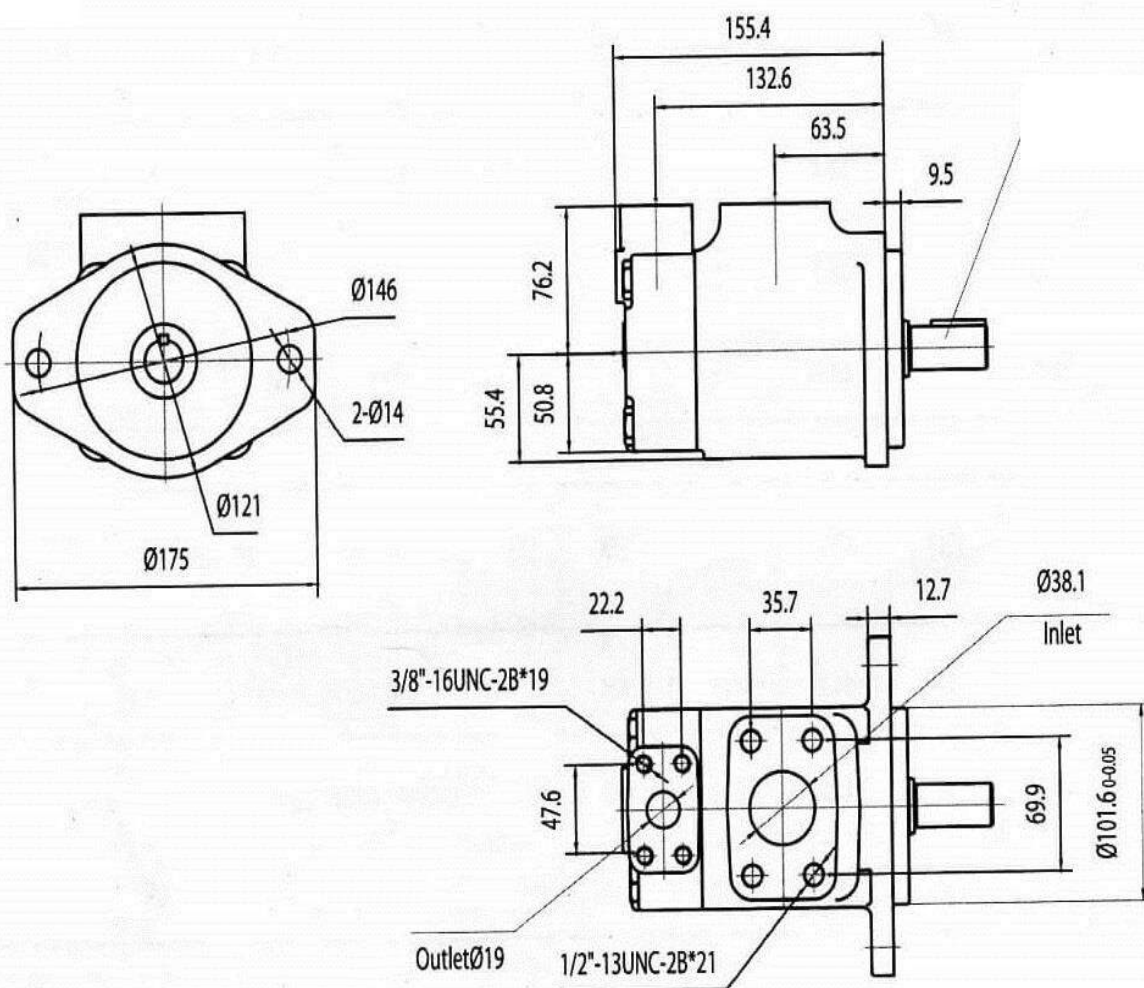


Para mayor informacion consultar a nuestro departamento técnico.



DIMENSIONES SERIE S25VQ,S35VQ,S45VQ

S25VQ, S35VQ, S45VQ

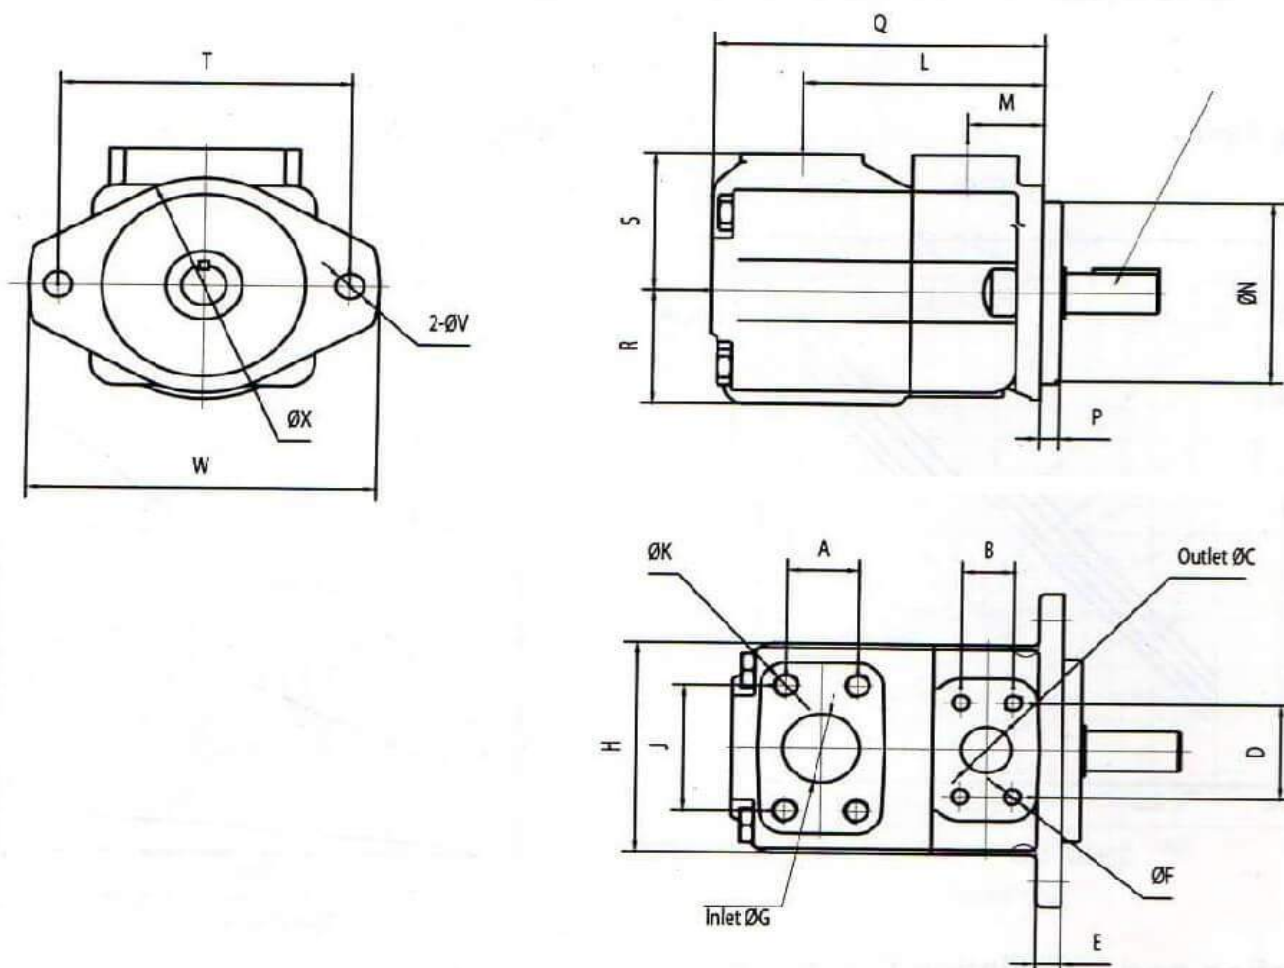


MODEL	A	B	ØC	D	E	ØG	H	J	L	M	N	P	Q	R
S25VQ	35.7	26.2	25.4	52.4	12.7	38.1	118	69.9	121	38.1	102	10	162	64
S35VQ	42.9	30.2	31.8	58.7	16	50.8	140	77.8	126	38.1	127	10	185	70
S45VQ	61.9	35.7	38.1	69.9	16	76.2	159	106.4	153	43	127	13	216	83

MODEL	S	T	RU	ØV	W	ØX	ØF	ØK
S25VQ	76.2	146	14	14.2	175	121	3/8"-16UNC	1/2"-13UNC
S35VQ	82.6	181	16	17.5	213	148	3/8"-16UNC	1/2"-13UNC
S45VQ	93.7	181	15	17.5	213	148	3/8"-16UNC	5/8"-11UNC

Para mayor informacion consultar a nuestro departamento técnico.




EJE CHAVETERO RECTO

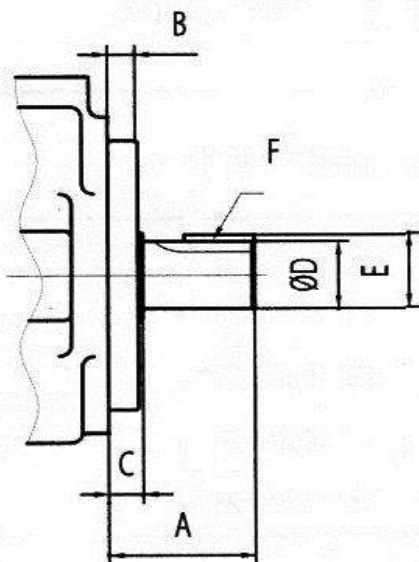

MODEL	A	B	C	ØD	E	F (Ancho*Alto)
S20VQ	59	9.53	12.1	22.22	24.4	4.78*32
S25VQ S2520VQ	59	9.53	11.1	22.22	24.4	4.75*32
S35VQ	73.2	9.53	11.1	31.75	35.1	7.94*38.1
S352#VQ	86	9.53	11.1	34.9	38.3	7.92*54
S45VQ	62	12.7	14.2	31.75	35.1	7.92*28.5
S45##VQ	87.4	12.7	14.2	38.07	42.1	9.53*50.8

EJE ESTRIADO

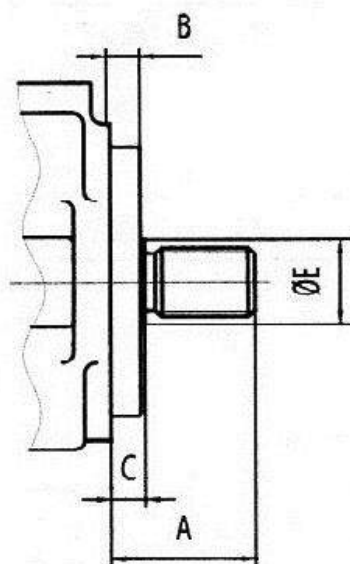

MODEL	A	B	C	ØE	Numero de dientes	F (Ancho* Alto)
S20VQ	41.1	9.53	11.1	22.17	24.4	4.78*32
S25VQ S2520VQ	44.5	9.53	11.1	22.17	24.4	4.75*32
S35VQ S352#VQ	58.7	9.53	11.1	31.7	25.4	4.75*33
S45VQ S45##VQ	61.9	12.7	14.3	31.7	26.4	4.75*34

Para mayor informacion consultar a nuestro departamento técnico.

**BOMBAS DOBLE DE PALETAS SERIE VQ PARA APLICACIONES MÓVILES***Reemplazo directo a Vickers serie VQ***Especificaciones:**


SERIES	CAUDAL (GPM)	DESPLAZAM. CC/REV	PRESIÓN MÁX. DE TRABAJO BAR(Psi)	MÁXIMA VELOCIDAD (RPM)	VELOCIDAD MIN. (RPM)
S##20VQ	5	18	210(3045)	2700	600
	8	27.4	210(3045)	2700	
	9	29.2	210(3045)	2700	
	11	36.4	210(3045)	2700	
	12	39.5	160(2320)	2700	
	14	45.9	140(2030)	2700	
S25##VQ S##25VQ	12	40.2	210(3045)	2700	
	14	45.4	210(3045)	2700	
	17	55.2	210(3045)	2500	
	21	67.5	210(3045)	2500	
	25	80.2	210(3045)	2500	
S35##VQ S##35VQ	25	81.6	210(3045)	2500	
	30	97.7	210(3045)	2500	
	35	112.8	210(3045)	2400	
	38	121.6	210(3045)	2400	
S45##VQ S##45VQ	42	138.7	175(2537)	2200	
	50	162.3	175(2537)	2200	
	60	193.4	175(2537)	2200	

Para mayor informacion consultar a nuestro departamento técnico.



DIMENSIONES SERIE S25VQ, S35VQ, S45VQ

S2520VQ, S35##VQ, 45##VQ

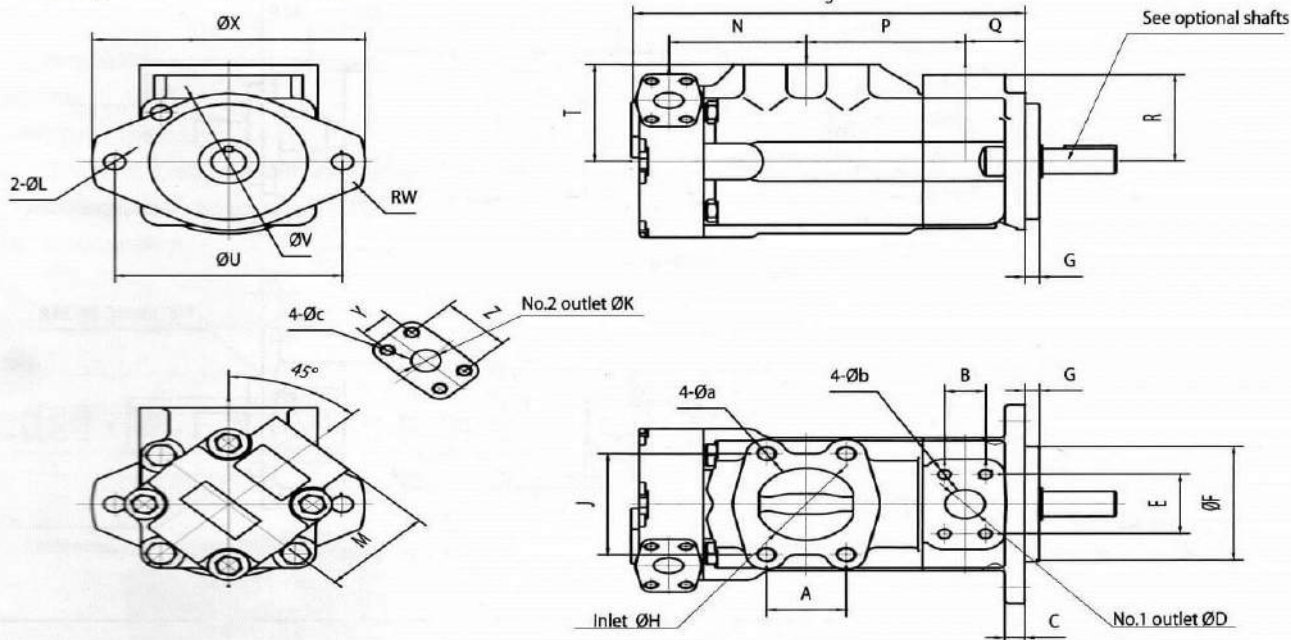


MODEL	Øa	Øb	Øc
S2520VQ	1/2"-13UNC	3/8"-16UNC	3/8"-16UNC
S3520VQ	5/8"-11UNC	7/16"-14UNC	3/8"-16UNC
S3525VQ	5/8"-11UNC	7/16"-14UNC	3/8"-16UNC
S4520VQ	5/8"-11UNC	1/2"-13UNC	3/8"-16UNC
S4525VQ	5/8"-11UNC	1/2"-13UNC	3/8"-16UNC

MODEL	A	B	C	ØD	E	ØF	G	ØH	J	ØK	ØL	ØK	ØK
S2520VQ	50.8	26.2	12.7	25.4	52.4	101.6	9.53	63.5	88.9	19.1	14.2	76.2	88.1
S3520VQ	62	30.1	15.9	31.75	58.7	127	9.53	76.2	106.3	19.1	17.5	76.2	99.6
S3525VQ	62	30.1	15.9	31.75	58.7	127	9.53	76.2	106.3	25.4	17.5	74.7	109.5
S4520VQ	69.9	35.7	15.9	38.1	69.9	127	12.7	88.9	120.6	19.1	17.5	76.7	102
S4525VQ	69.9	35.7	15.9	38.1	69.9	127	12.7	88.9	120.6	25.4	17.5	74.7	136

MODEL	P	Q	R	S	T	ØU	ØV	RW	ØX	Y	Z
S2520VQ	101.6	38.1	76.2	250	85.3	146.1	120.7	14	147.7	22.2	47.6
S3520VQ	114.3	38.1	82.6	273.3	88.9	181	148	16	213	22.2	47.6
S3525VQ	114.3	38.1	82.6	287.3	88.9	181	149	17	213	26.2	52.4
S4520VQ	119.4	42.9	93.7	303.5	102.4	181	150	18	213	22.2	47.6
S4525VQ	119.4	42.9	93.7	325	102.4	181	151	19	213	26.2	52.4

Para mayor informacion consultar a nuestro departamento técnico.

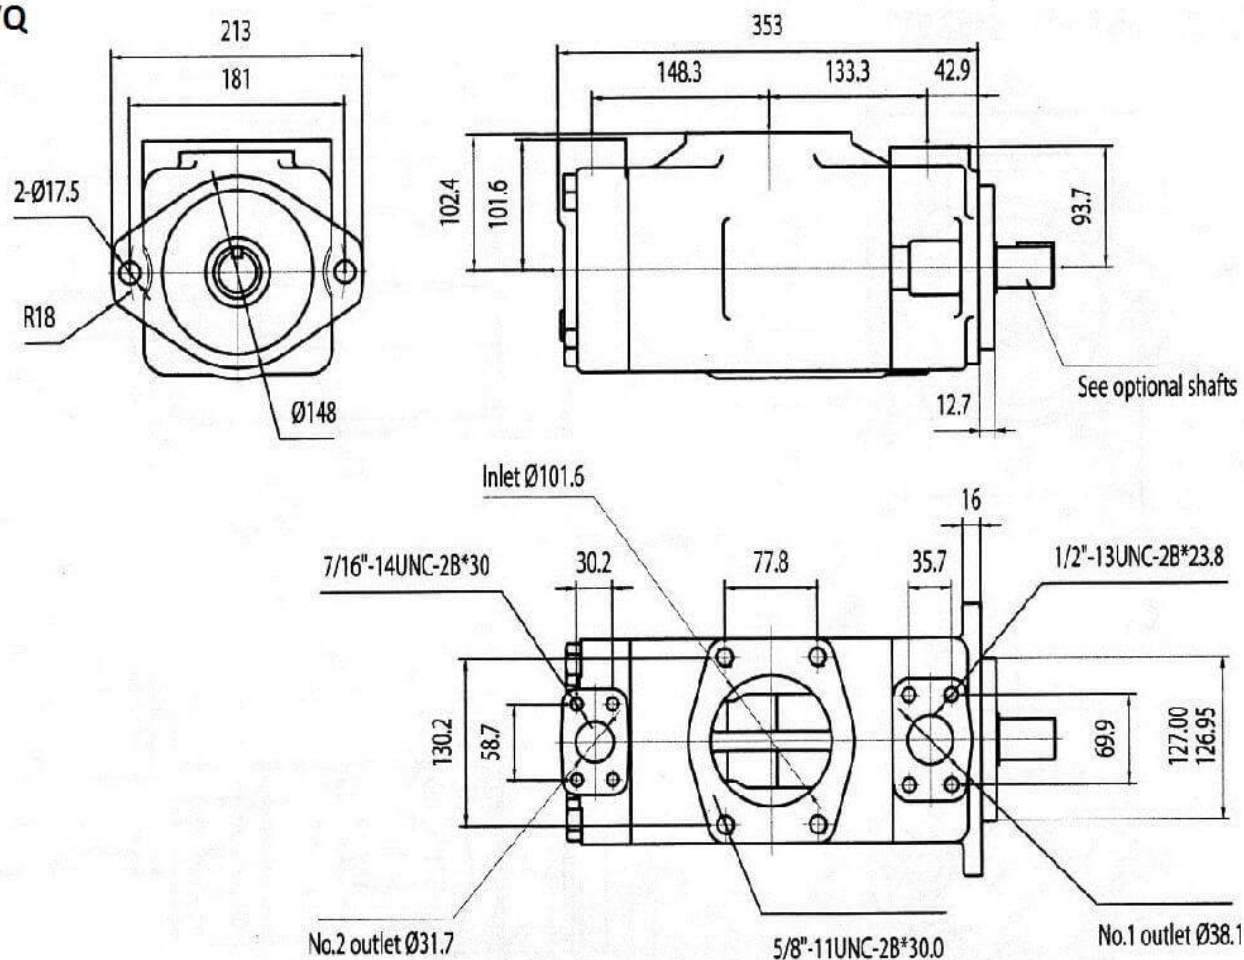***DIMENSIONES SERIE S4535VQ*****S4535VQ**

Para mayor informacion consultar a nuestro departamento técnico.



ANILLOS, CARCAZAS, CARTUCHOS, EJES, RETENES Y KIT DE SELLOS



ANILLOS Y CARTUCHOS

SERIES	CAUDAL (GPM)	DESPLAZAM. TO CC/REV
S20VQ	5	18
	8	27.4
	9	29.2
	11	36.4
	12	39.5
	14	45.9
S25VQ	12	40.2
	14	45.4
	17	55.2
	21	67.5
	25	80.2
S35VQ	25	81.6
	30	97.7
	35	112.8
	38	121.6
S45VQ	42	138.7
	50	162.3
	60	193.4

SERIES	CAUDAL (GPM)	DESPLAZAM. CC/REV
S##20VQ	5	18
	8	27.4
	9	29.2
	11	36.4
	12	39.5
	14	45.9
S25##VQ S##25VQ	12	40.2
	14	45.4
	17	55.2
	21	67.5
	25	80.2
S35##VQ S##35VQ	25	81.6
	30	97.7
	35	112.8
	38	121.6
S45##VQ S##45VQ	42	138.7
	50	162.3
	60	193.4

RETEN (NITRILO Y VITÓN)
SV10
SV20
S20VQ
S25VQ
S35VQ
S45VQ

KIT DE SELLOS (NITRILO Y VITÓN)
S20VQ
S25VQ
S35VQ
S45VQ

Para mayor informacion consultar a nuestro departamento técnico.